

QUALTECH®

# CLA – CABINET WASHER

## Safety, Economy, and Quality

Our cabinet washer is designed to clean a wide range of equipment intended for the agri-food industry. 3 to 5 automated washing cycles (pre-wash, acid wash, caustic wash, rinse, and disinfection) can be configured and adjusted as needed. Using various types of spray headers designed according to your wash needs.

The cabinet allows for efficient cleaning on a wide variety of surfaces.


- ◆ Sanitary construction in stainless steel 304 or 316
- ◆ Programmable wash cycles according to need (pre-wash, acid wash, caustic wash, rinse, and disinfection)
- ◆ Easy programming of washing parameters
- ◆ Spray nozzles design for the task at hand
- ◆ Recycling of water and detergents through conductivity analysis in a closed cycle
- ◆ Automatic fill and heat cycles
- ◆ Possibility to wash multiple components of different sizes
- ◆ Self-cleaning (optional)



**24/7  
Emergency  
Service**

1.888.339.3801  
[info@qualtechgroup.com](mailto:info@qualtechgroup.com)

# Specifications:

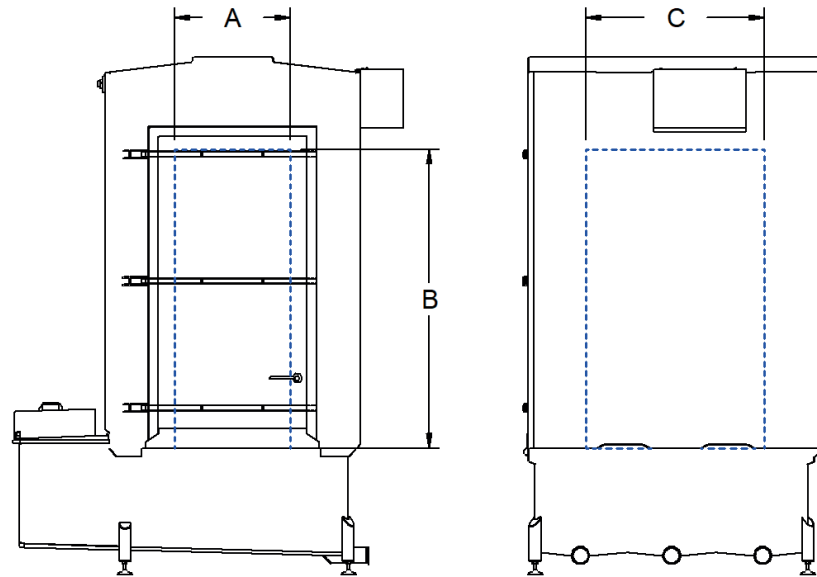

CLA01	Configuration choice	ABC	Code	(A)
<b>Washable area (in inch - width x height x depth)</b>		ABC		
<b>Washing cycle<sup>1</sup></b>	Pre-wash / Wash / Sanitizer	<input type="checkbox"/>	3	(B)
	Pre-wash / Wash / Rinse / Sanitizer	<input checked="" type="checkbox"/>	4	
	Pre-wash / Acid wash / Caustic wash / Rinse / Sanitizer	<input type="checkbox"/>	5	
<b>Spray header</b>	Horizontally motorized	<input checked="" type="checkbox"/>	1	(C)
	Vertically motorized	<input type="checkbox"/>	2	
	Spin header - pressure driven	<input type="checkbox"/>	3	
	Spin header - motorized	<input type="checkbox"/>	4	
<b>Door</b>	(1x) Manual door	<input checked="" type="checkbox"/>	1	(D)
	(2x) Manual doors	<input type="checkbox"/>	2	
	(1x) Sliding door	<input type="checkbox"/>	3	
	(2x) Sliding doors	<input type="checkbox"/>	4	
	Guillotine door	<input type="checkbox"/>	5	
	Curtain door	<input type="checkbox"/>	6	
<b>Heating<sup>2</sup></b>	By customer	<input type="checkbox"/>	1	(E)
	Tubular heat exchanger - water	<input checked="" type="checkbox"/>	2	
	Tubular heat exchanger - steam	<input type="checkbox"/>	3	
	Electrical element	<input type="checkbox"/>	4	
<b>Electrical supply</b>	460V / 3ph / 60Hz	<input type="checkbox"/>	43	(F)
	575V / 3ph / 60Hz	<input checked="" type="checkbox"/>	53	
<b>Material</b>	AISI 304	<input checked="" type="checkbox"/>	4	(G)
	AISI 316	<input type="checkbox"/>	6	

1-Washing cycle: Dosing pump(s) included  
 2-Heating with exchanger: Valve at the system inlet included

● : Default  
 □ : Option

CLA01 - (A) - (B)(C)(D)(E) - (F) - (G)

CLA01 - 307545 - 4 1 1 2 - 53 - 4